




ARENA LED 8274




ARENA 6724

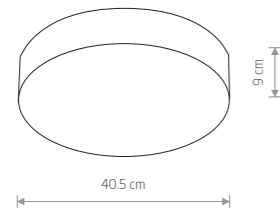

### ARENA

painting steel, plastic PMMA


- 6724    6725
- 6770    8273
- 3xE14, max 20W
- IP44

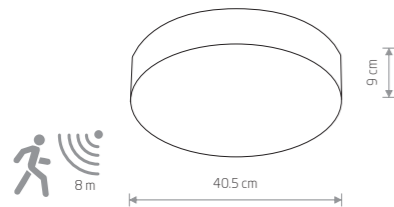

### ARENA SENSOR

painting steel, plastic PMMA

- 8832    8833    7953
- 3xE14, max 20W
- IP44

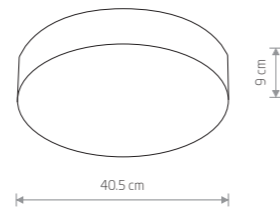

### ARENA LED

painting steel, plastic PMMA

- 6726    6727
- 6771    8274



ARENA LED 6727

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6726	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
6727	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
6771	18W LED	4000K	1600 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h
8274	18W LED	4000K	1600 lm	100°	≥ 80	220-230 V, 50/60 Hz	⊕	>0,95	IP44	50000h